

SPECIFICATION

Product : Topview 5050 White SMD LED

Part No. : IWS-S5A56-RGB-K3

Date : 2011. 07. 21 Ver. 1.0

Proposed By	Checked By	Checked By	Checked By	Approval
결재완료				

Comment



ITSWELL Co., Ltd
58B-4L, 626-3 Gojan-dong, Namdong-gu, Incheon 405-817 KOREA
TEL:+82-32-813-1801, FAX:+82+32-816-1900
URL: <http://www.itswell.com>

Topview 5450 SMD LED

IWS-S5A56-RGB-K3




1. Features

- 3 Chip High-Luminosity SMD LED
- 5.4 x 5.0 x 1.2 mm (L x W x H), 6-Pin, Small Size Surface Mount Type
- Wide Viewing Angle
- Long Operating Life

2. Applications

- Automotive: Backlight in Dashboard and Switch
- Lighting Device: Indicator, General Lighting
- Camera Flash, Hand Carrier Flash
- General Use

3. Outline Drawing and Dimension

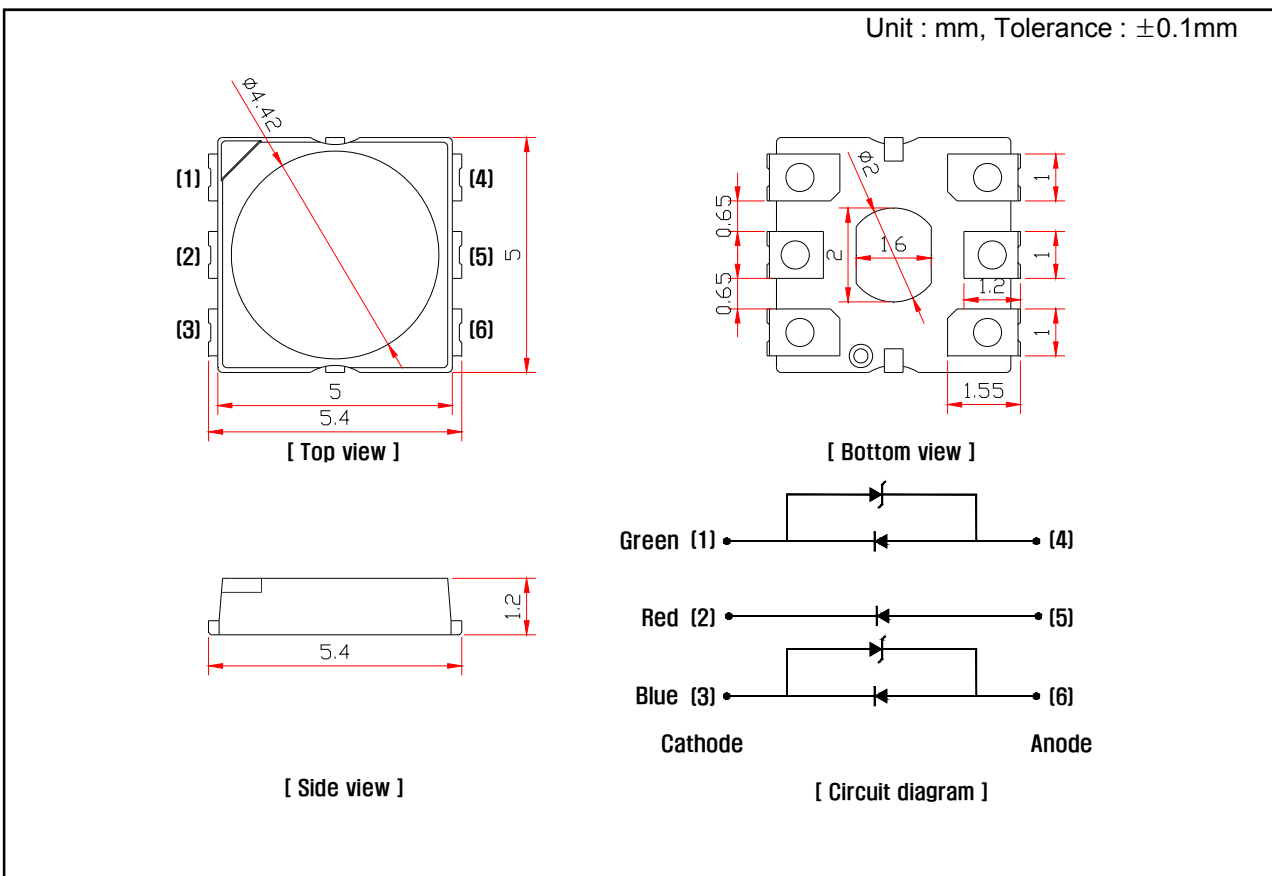

Note

1. All dimensions are in millimeters
2. All dimensions without tolerances are for reference only

Topview 5450 SMD LED

IWS-S5A56-RGB-K3



4. Absolute Maximum Ratings($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value			Unit
		Red	Green	Blue	
Power Dissipation	P_d	360	600	600	mW
Continuous Forward Current	I_F	150	150	150	mA
Peak Forward Current ^{*1}	I_{FP}	400	400	400	mA
Operating Temperature	T_{opr}	-30 ~ 85			$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ 100			$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 (5sec)			$^\circ\text{C}$

*1 Duty ratio = 1/10, Pulse width = 0.1ms

5. Electro-optical Characteristics($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.	
Forward Voltage ^{*2}	V_F	$I_F = 150\text{mA}$	Red	1.8	-	2.4	V
			Green	3.0	-	4.0	V
			Blue	3.0	-	4.0	V
Reverse Current	I_R	$V_R = 5\text{V}$	Red	-	-	10	μA
Reverse Voltage	V_{ZR}	$I_R = 5\text{mA}$	Green	0.7	-	1.5	V
			Blue	0.7	-	1.5	V
Dominant Wavelength ^{*3}	W_D	$I_F = 150\text{mA}$	Red	618	-	635	nm
			Green	515	-	535	nm
			Blue	455	-	475	nm
Luminous Flux ^{*4}	l_m	$I_F = 150\text{mA}$	Red	8	-	14	lm
			Green	14	-	24	lm
			Blue	1	-	6	lm
Viewing Angle ^{*5}	$2\theta_{1/2}$	$I_F = 150\text{mA}$	-	-	120	-	deg

*2 Forward Voltage has an accuracy of $\pm 0.1\text{V}$

*3 Dominant Wavelength has an accuracy of $\pm 2\text{nm}$

*4 Luminous Flux is tested by a tester calibrated by CAS 140B(CIE LED_B) and has an accuracy of 10%

*5 Viewing Angle is the angle until 50% of brightness measured from the front part of LED.

5.1 Luminous Flux Rank(I_m , $I_F = 150mA$)

RANK	RED	GREEN	BLUE
A0			1 - 6
B	8 - 10		
C	10 - 12		
D	12 - 14		
E		14 - 17	
F		17 - 20	
G		20 - 24	
J			
K			
L			

5.2 Dominant Wavelength Combination Rank(nm, $I_F = 150mA$)

RANK	RED	GREEN	BLUE
A	618 - 635	515 - 535	455 - 475


5.3 Forward Voltage Rank (V, $I_F = 150mA$)

RANK	RED	GREEN	BLUE
A	1.8 - 2.2	3.0 - 3.2	3.0 - 3.2
B	2.2 - 2.4	3.2 - 3.4	3.2 - 3.4
C		3.4 - 3.6	3.4 - 3.6
D		3.6 - 4.0	3.6 - 4.0


6. Typical Characteristics Curves

6.1 Red


Forward Current vs. Forward Voltage

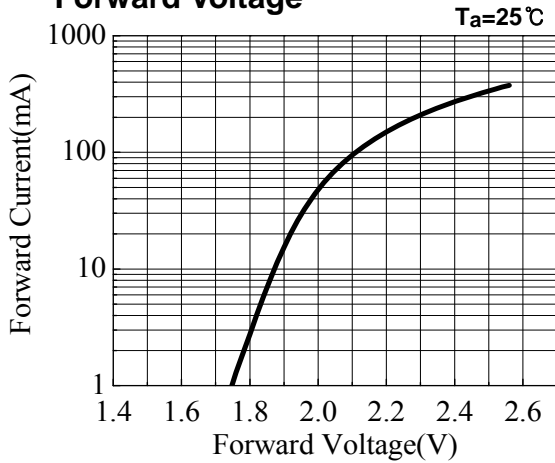


Forward Current vs. Ambient Temperature

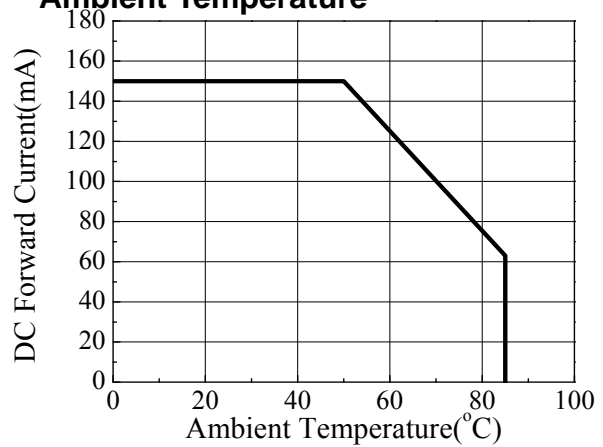


Relative Luminous Intensity vs. Ambient Temperature

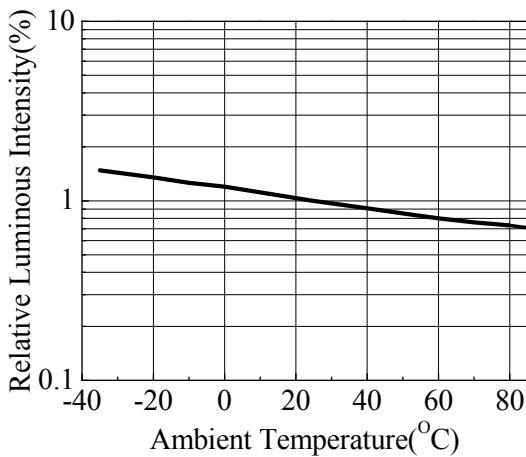


Relative Luminous Intensity vs. Forward Current

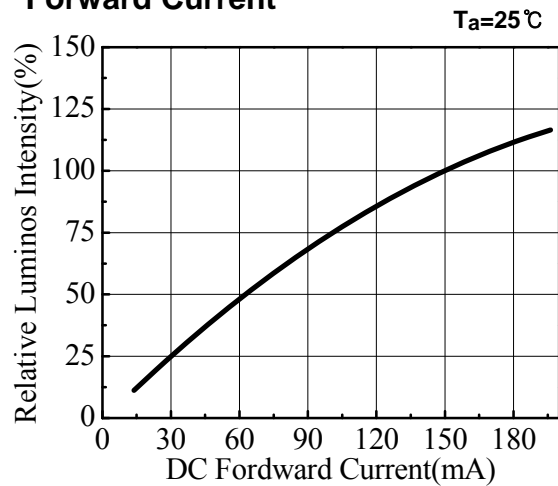

Relative Intensity vs. Wavelength

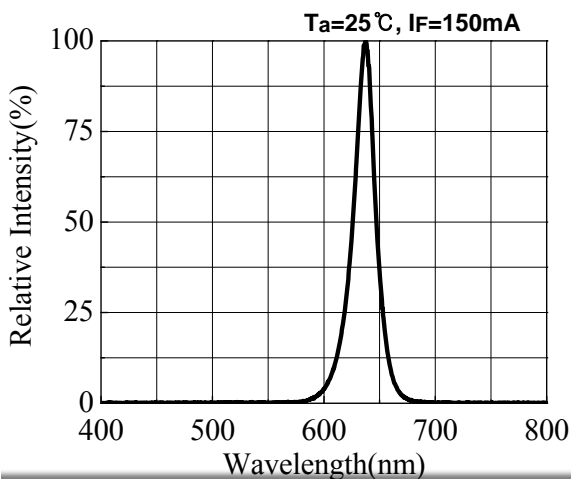

Radiation Diagram

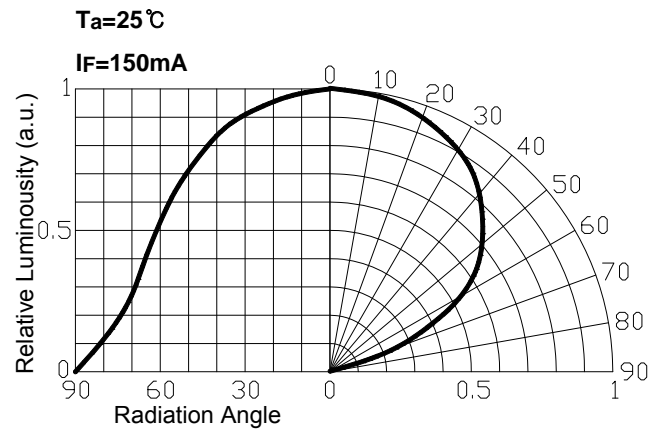


Topview 5450 SMD LED

IWS-S5A56-RGB-K3




6.2 Green


Forward Current vs. Forward Voltage

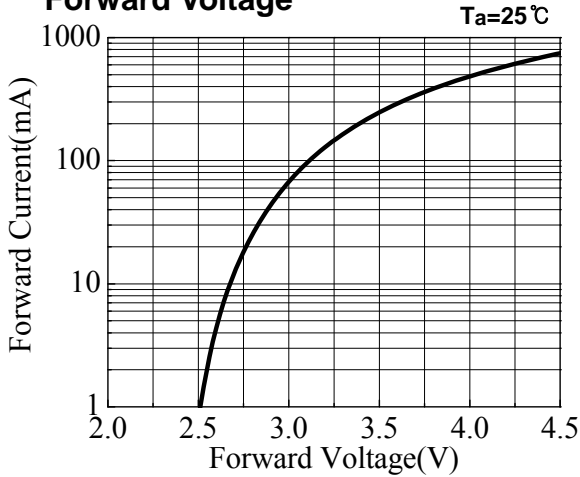


Forward Current vs. Ambient Temperature

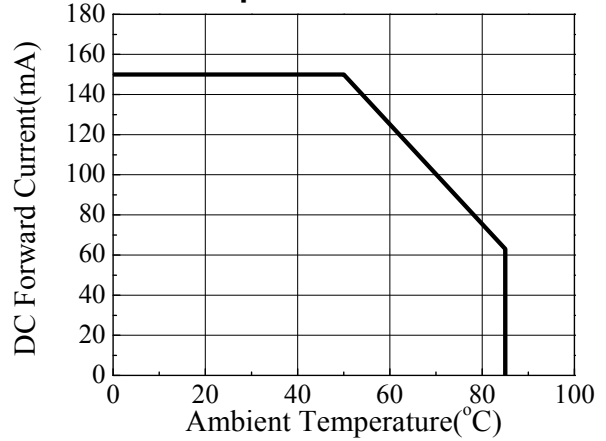


Relative Luminous Intensity vs. Ambient Temperature

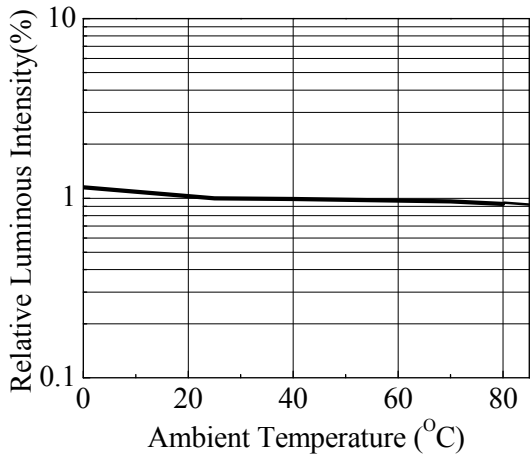


Relative Luminous Intensity vs. Forward Current

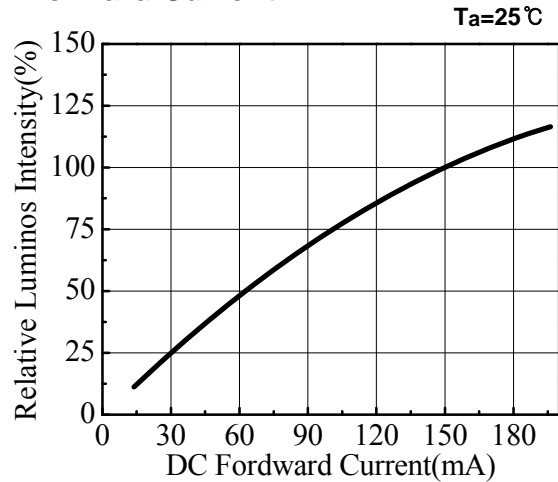

Relative Intensity vs. Wavelength

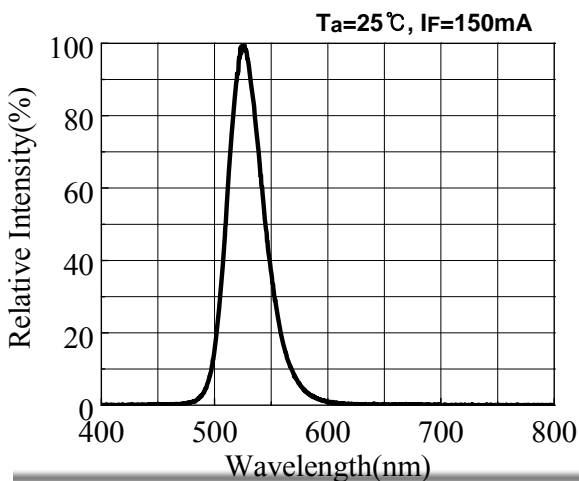

Radiation Diagram

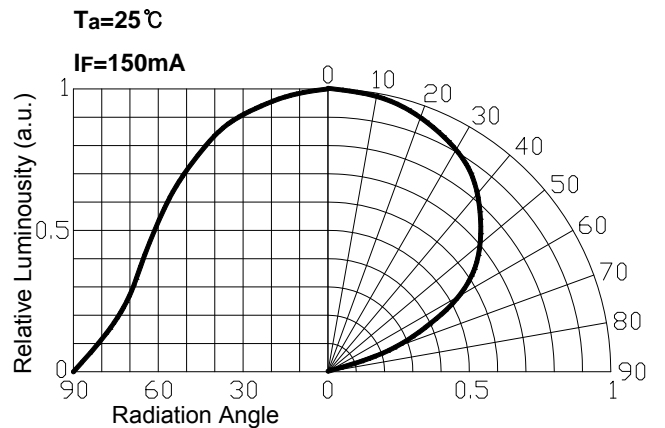


Topview 5450 SMD LED

IWS-S5A56-RGB-K3




6.3 Blue


Forward Current vs. Forward Voltage

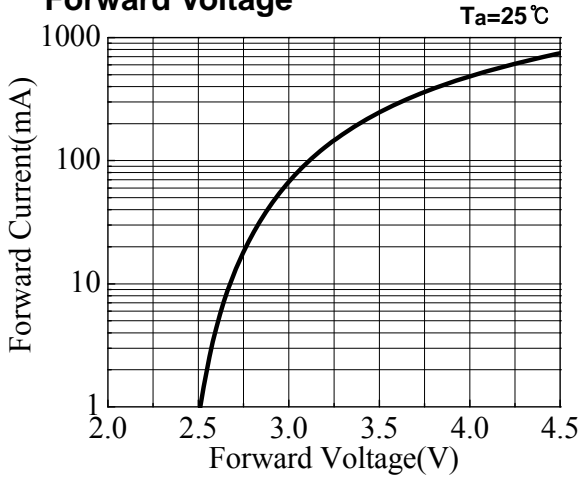


Forward Current vs. Ambient Temperature

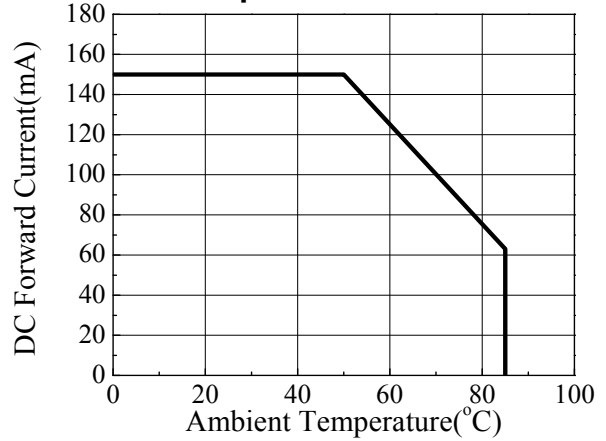


Relative Luminous Intensity vs. Ambient Temperature

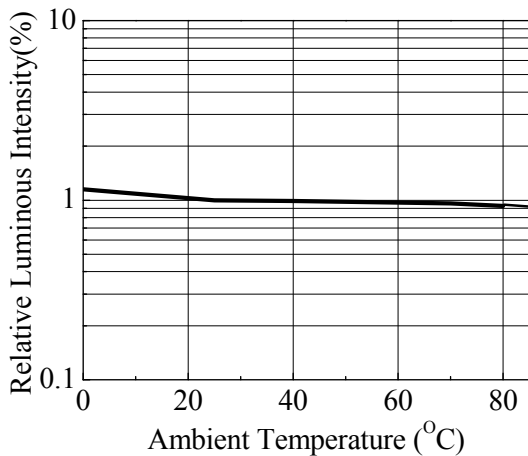


Relative Luminous Intensity vs. Forward Current

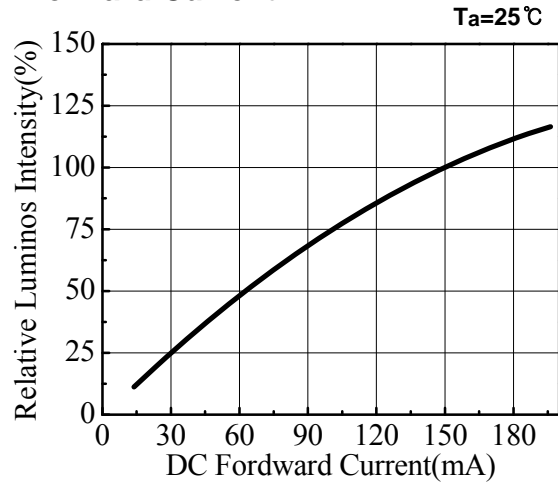

Relative Intensity vs. Wavelength

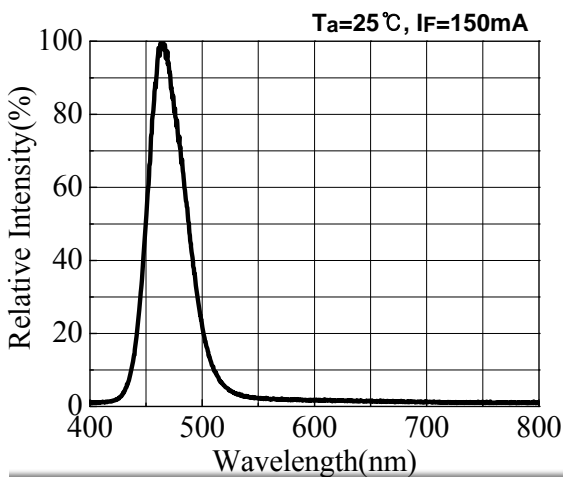

Radiation Diagram

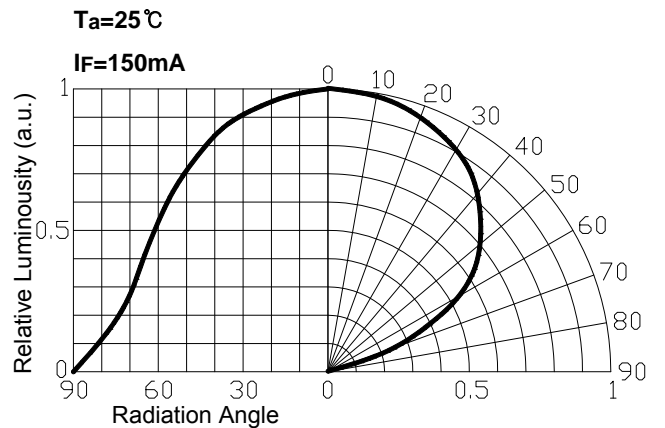


Topview 5450 SMD LED IWS-S5A56-RGB-K3




7. Dimension of Tape / Reel

7.1 Tape Dimension

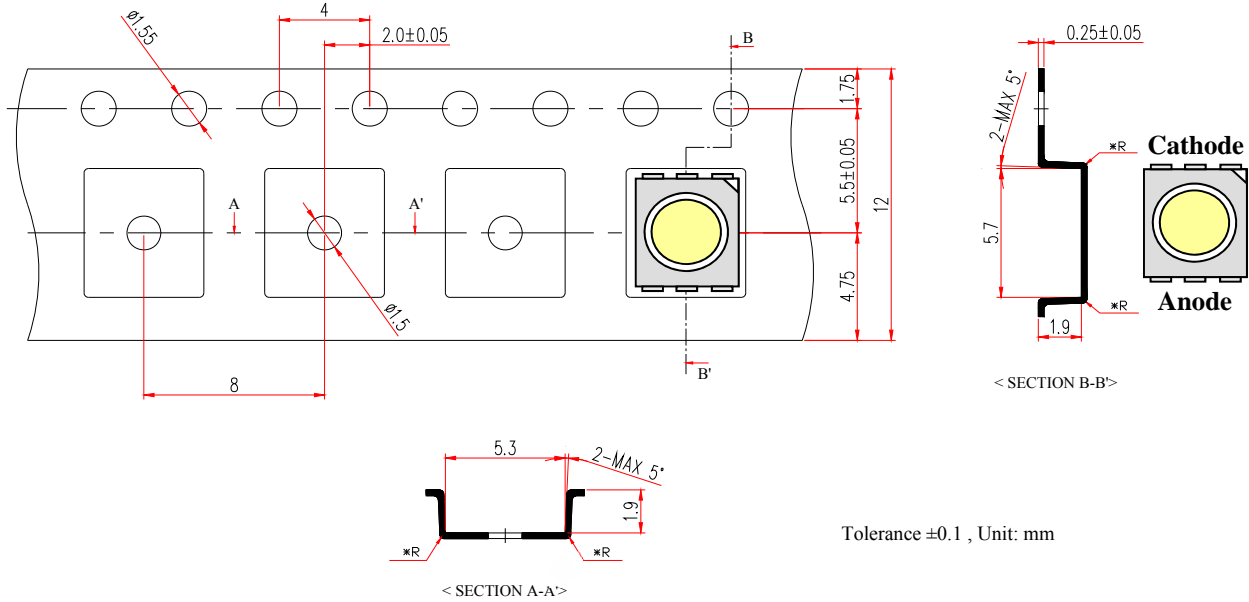

7.2 Reel Dimension

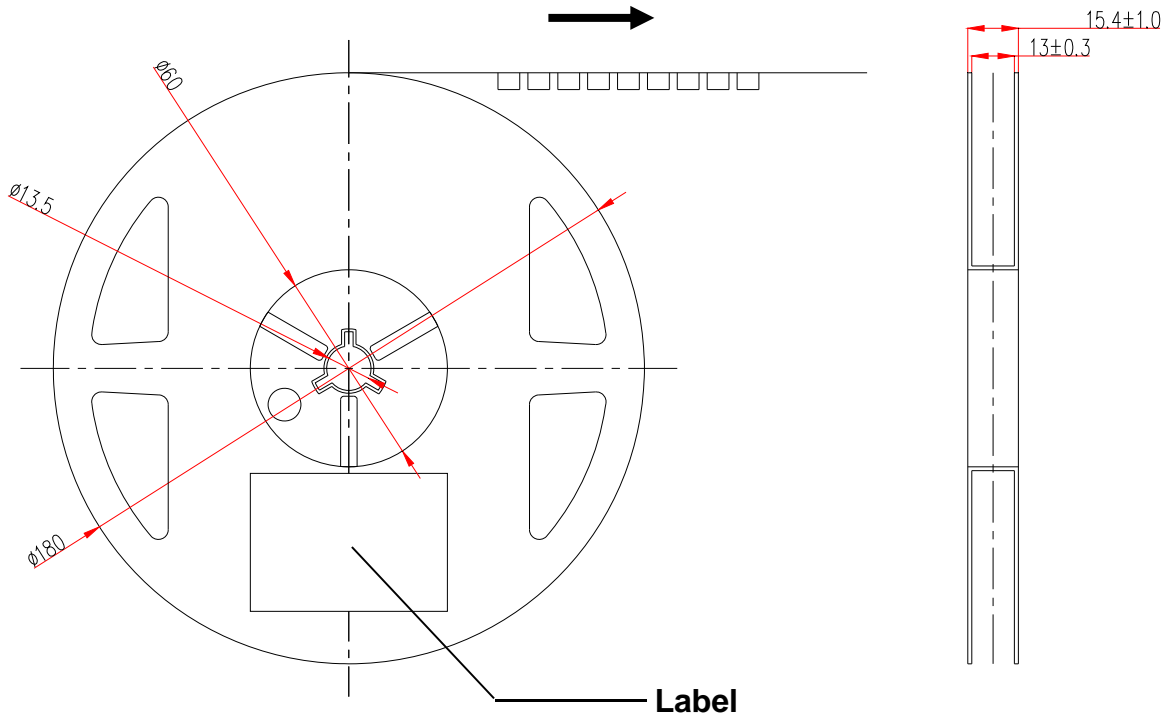


Topview 5450 SMD LED IWS-S5A56-RGB-K3



8. Packing Dimension

Unit :mm


Reel

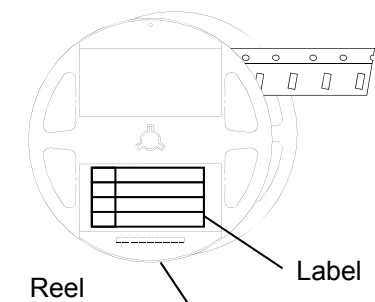

Bake: 60°C, 48hrs




Aluminum Shield Bag

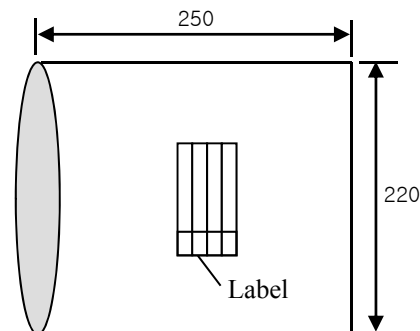

Including Silica gel in a bag



Card Board Box

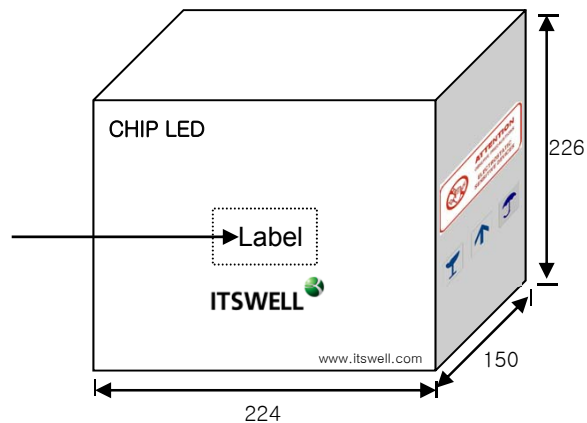

Al Pack Label, Reel Label (70 × 37)

ITSWELL				
Lot :	IWS-S5A56-RGB-K3			
	MIN	AVG	MAX	STD
V _F [Volt]				
Φ _v [lm]				
W _D [nm]				
Q'ty :	yyyy/mm/dd			


	Dimensions (mm)	Reel / Box	Total Q'ty / Box(pcs)
Reel	Φ180mm, 15mm Width	-	1,000 Max
Al Shield Bag	250x220	-	1,000 Max
Card Board Box	224x150x226	9 Max	9,000 Max

9. Precaution in Use


9.1 Soldering Conditions

- When soldering Power SMD, Heat may affect the electrical and optical characteristics of the LEDs.
- In soldering, do not stress the lead frame and the resin part under the high temperature.
- The silicone part should be protected from mechanical stress or vibration until the Power SMD return to room temperature after soldering.
- Preliminary heating to be at 120~150 °C max. for 120 Seconds max.
- Soldering heat to be at 260 °C max. for 5 sec. Max.
- For manual Soldering is Not more than 3 sec @MAX 350 °C, under soldering iron

< Lead Free >

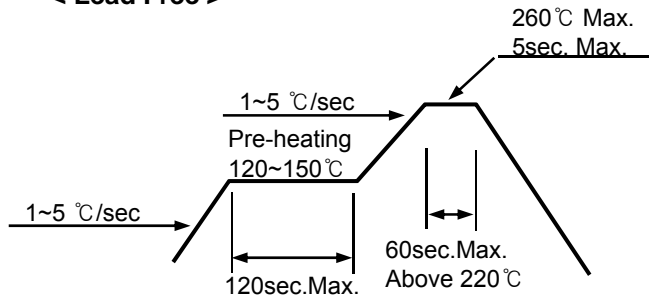

<Recommendable Soldering Pattern>

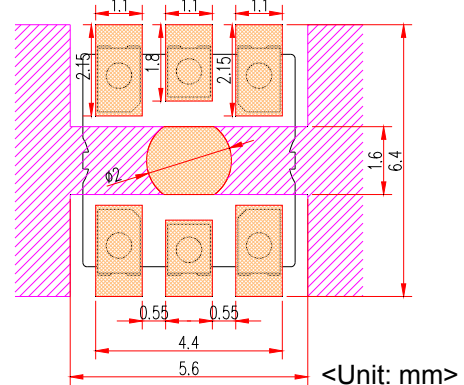

9.2 Storage

- Before opening the package, the LEDs should be kept at 30 °C or less and 70%RH or less.
- The LEDs should be used within a year.
- After opening the package, the LEDs should be kept at 30 °C or less and 30%RH or less.
- The LEDs should be used within 168 hours (7 day) after opening the package.
- If the moisture absorbent material (silicagel) has faded away or the LED have exceeded the storage time, baking treatment should be performed using the following conditions.
Baking treatment: 60 °C ±5 for 48 hours.

9.3 Static Electricity

- Static electricity or surge voltage damages the Power SMD . It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- A tip soldering iron is requested to be grounded. An ionizer should also be installed where risk of static.
- All devices, equipment and machinery must be properly grounded (via 1MΩ). It is recommended that measures be taken against surge voltage to the equipment that mounts the Power SMD.

9.4 Cleaning

- Isopropyl Alcohol or Ethylene Alcohol is recommended in 5 minutes at room temperature. Don't use unspecified chemical may cause crack or haze on the surface of the epoxy resin.
- Before cleaning, a pre-test should be done to confirm whether any damage to the LED will occur.
- Freon solvents should not be used to clean the LEDs because of worldwide regulations.

9.5 Heat Generation

- When the LEDs are illuminating, operating current should be decided after being considering the ambient maximum temperature.
- Please consider the heat generation of the LED when it is designed the PCB.

10. Reliability

10.1 Reliability Test Item

Test Items	Test Conditions	Notes
High Temperature Storage	100℃, 1,000hr.	0/25
Low Temperature Storage	-40℃, 1,000hr.	0/25
Temp. Humidity Storage	60℃, 90% RH, 1,000hr.	0/25
Steady State Operating life	25℃, 180mA, 1,000hr.	0/25
High Temperature Operating Life	85℃, 75mA, 1,000hr	0/25
Low Temperature Operating Life	-30℃, 150mA, 1,000hr.	0/25
Steady State Operating life Of High Humidity Heat	60℃, 90% RH, 112.5mA, 1,000hr.	0/25
Thermal Shock	-40℃(30min.)→100℃(30min.), 100 cycle	0/20
ESD	HBM, 100 pF, 1.5K ohm, 3 times	0/20

10.2 Criteria for Judging the Damage

Items	Test Conditions	Criteria for judgment
Luminous Flux (Φ_V)	$I_F = 150\text{mA}$	> 70% of S
Forward Voltage (V_F)	$I_F = 150\text{mA}$	Less than $\pm 110\%$ of U


* U means the upper limit of specified characteristics, S means initial value.

Topview 5450 SMD LED


IWS-S5A56-RGB-K3



11. Part Name Description

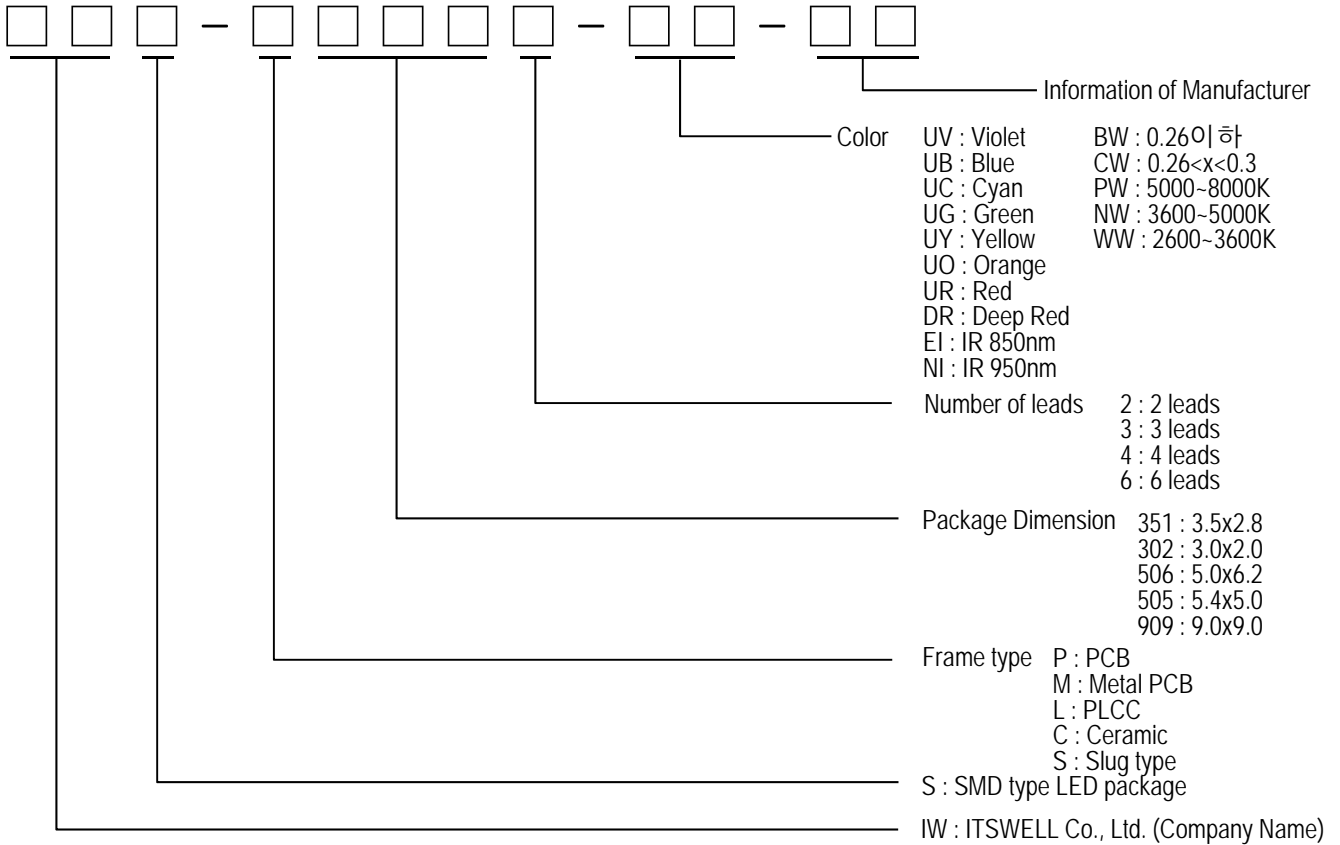

12. Rank Description

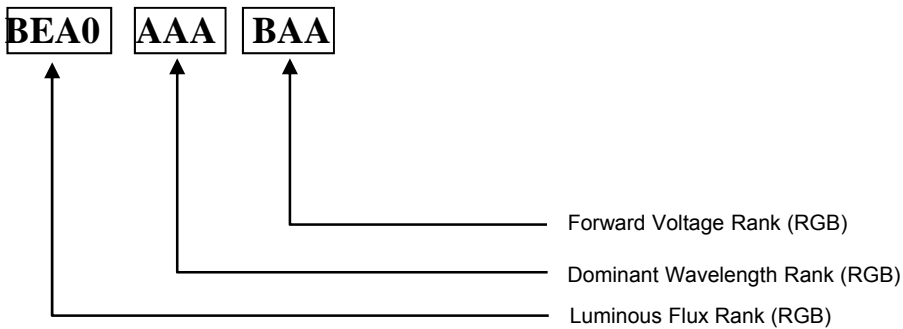

13. Attention : Electric Static Discharge (ESD) Protection



The symbol shown on the page herein to introduce 'Electro-Optical Characteristics'. ESD protection for GaP and AlGaAs based chips is still Necessary even though they are safe in low static-electric discharge. Material in AlInGaP, GaP, or/and InGaN based chips are STATIC SENSITIVE devices. ESD protection has to considered and taken in the initial design stage. If manual work/process is needed, please ensure the device is well protective from ESD during all the process.

